



## **CHAP.1 Specification**

### **1.1 Specification**

- a control Pad
- a Relay board
- a Power Supply
- a 37Pin Wire

### **1.2 Installation**

-


## CHAP.2 Operation

### 2.1 Panel



## 2.2 STOP mode


At power on, system self-test then turn into STOP mode. Press "STOP" key in other mode will also enter STOP mode.

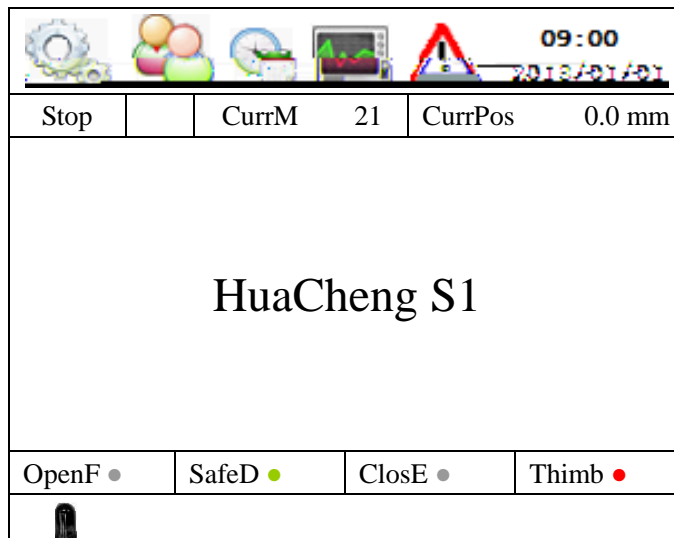

Signal is red or green when ON. Signal is gray when OFF.

## 2.3 Find 0-point

After power on, it is need to find mechanical 0-point.


To find this point, users should press  key in STOP mode.. Arms move from the Z-outsafeside to the Z-origin side.

After find the 0-point, users can turn to AUTO mode or MANUAL mode.

Arms can only move to a positive direction from this point. And it can not move to a position below this point when return. This point is defined as position 0.0mm.

Users can not change mode or edit parameters when finding the 0-point. Users can press emergency-stop button to break the process when error occurs.


## 2.4 MANUAL mode

press  key in STOP mode, system turn into MANUAL mode. Action key can be used to perform certain operation.

The following action is prohibit for safety reasons.

- After arms down in IMM mold-in area, can not do vertical or horizontal rotate.

- After arms down in IMM mold-in area, traverse can not exceed the mold-in area.
- Arms can not go down in IMM mold-in area without Mold-opened signal.

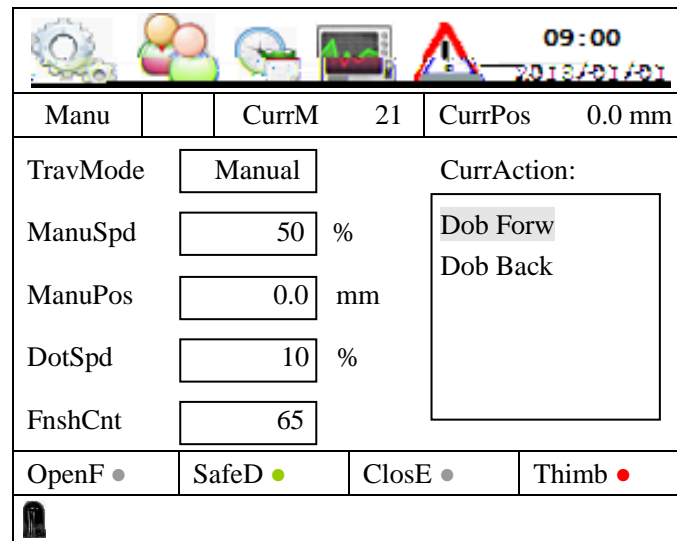

- TravMode: Press **ENTER** key to select manual mode or jogging mode.

Fast mode: Press Tav.Out key once, arms move to the set ManuPos position. Press Tav.In key once, arms move to the waiting position.

Jogging mode: Press Tav.Out key down, Arms go outside. Release the key, arms stop.

- ManuSpeed: Arms traverse with this speed in fast mode.
- ManuPos: Arms move to this position in Fast mode.
- DotSpeed Arms traverse with this speed in jogging mode
- FnshCnt The count of products taken out by Arms.



arm raising action



arm descending action




arm going forward



arm going backward



clip on/off.



Vacuum sucks on/off .




Arm rotating in/out action, press once more, acting to the other side



Traversing out.



Traversing in.



Arm select. Main/Vice/both option.



Spare select. SP1 /SP2 /Clipper /Transport option.



Spare valve ON/OFF.



Finding the 0-point


Press parameter key in MANUAL mode, show as follows.



Stop		CurrM 21	CurrPos 0.0 mm
	ManuSpd	<input type="text" value="50"/>	%
	ManuPos	<input type="text" value="600.0"/>	mm
	DotSpd	<input type="text" value="10"/>	%
	TackPos	<input type="text" value="0.0"/>	mm
OpenF ●	SafeD ●	ClosE ●	Thimb ●


- ManuSpd      Set traversing speed for Fast mode.
- ManuPos      Set traversing position for Fast mode.
- DotSpeed     Set traversing speed for jogging mode.
- TackPos       Display Mold-in descending position.

### 2.5 ADJUST mode




Press  key twice, turn into ADJUST mode. In this mode, users can adjust the down-limit/forward-limit/backward-limit position of Main/Vice arm. Totally 7 output signal (6 actions and 1 direction ) used to drive 12 relays.

 <span style="float: right;">09:00 2018/01/01</span>					
Man u	1/2	CurrM	21	CurrPos	0.0 mm
In	MainAdj	Out	In	MainAdj	Out
	Main Up	Y40 ●		MTravForw	Y43 ●
●	MainDown	Y40	●	MTravBack	Y43
	MPsForw	Y41 ●		Y46 Negative	●
●	MPosBack	Y41		<b>HP.Adjust</b>	
OpenF ●	SafeD ●	ClosE ●	Thimb ●		
					

Moving cursor to the adjust position, press  key to make sure.

### 2.6 AUTO mode



Press  key in STOP mode, system turn into Auto-prepare mode, then press "Start" key to turn into AUTO mode.

Auto		CurrM	21	CurrPos	0.0 mm
SetProNo			5000		
ActProNo			1		
AutoCycl			30.0 s		
TakeTime			5.0 s		
ProTime			5.0 s		
CurrAct			Spin Outct		


- SetProNo: The product set value. Alarm when picker cycle reached the value.
- ActProNo: Record current picker cycle number.
- AutoCycl: Time used in current cycle.
- TakeTime: Fetch time. Counting from IMM mold-opened to picker output MoldClose Enable.
- ProTime: Run time for action.
- CurrAct: Current action.


ProTBT1 01N 117.62 reW\* nTJ.33 559.63 Tm0 g{SpiC q171.27 553.27 252.89 11en-US)>>> BDC q171.27 553.4 0EMC



## CHAP.3 Function

### 3.1 Basic



Press  Key in STOP mode, enter FUNC Mode, panel shows as follows.


 <span style="float: right;">09:00</span>			
Stop		CurrM 21	CurrPos 0.0 mm
Language	English	ChkVFix	PP
SetMold	30000	ChkVaccu	Use
OpenDly	5.0 s	ChkHold	Not Use
ThimbDly	1.0 s	ClearPro	OFF
ChkMFix	PP	KeySound	OFF
OpenF ●	SafeD ●	ClosE ●	Thimb ●



- Language: Chinese/English optional.
- SetMold: Alarm when picker cycle reached this set product number.
- OpenDly: Time for Mold-opened Delay. After received the Mold-opened signal, picker start waiting for this delay time, then shutdown Moldclose enable signal.
- ThimbDly: Time for Ejection Delay. After this delay, output Ejection enable signal.
- ChkMFix ( Check main fix ) :
  - PP: Must get a limit signal ON when clip successfully.
  - RP: Must get a limit signal OFF when clip successfully.
  - No use: Do not concren the limit signal when clip.
- ChkVFix ( Check vice fix ) : Has same means as above.
- ChkVacuum:
  - Use: Must get a limit signal ON when suck successfully.
  - No use: Do not concren the limit signal when suck.
- ChkHold: Has same means as above.
- ClearPro: Clear current product count when set ON. It is OFF in normal operation.
- KeySound: When set ON, the controller beep when key down.

### 3.2 Special

Press  key twice in STOP mode, enter password page.

 <span style="float: right;">09:00 2018/01/01</span>			
Stop		CurrM 21	CurrPos 0.0 mm
PassWord <input type="text" value="****"/>			
OpenF ●	SafeD ●	ClosE ●	Thimb ●
			

Input "2011" ,then press  key, enter special function pages. The following is special function page 1.

 <span style="float: right;">09:00 2018/01/01</span>			
Stop	1/4	CurrM 21	CurrPos 0.0 mm
CycleTime	<input type="text" value="600.0"/>	s	StdbPos <input type="text" value="Inside"/>
Thimb	<input type="text" value="Use"/>	StopSafe	<input type="text" value="NoLockM"/>
SafeDoor	<input type="text" value="Use"/>	SubPutDe	<input type="text" value="0.5"/> s
MidMold	<input type="text" value="Not Use"/>	StartPos	<input type="text" value="0.0"/>
StdbGes	<input type="text" value="Verti"/>	EmbInMld	<input type="text" value="Not Use"/>
OpenF ●	SafeD ●	ClosE ●	Thimb ●
			

1.
  - CycleTime: The maximum time set for picker cycle. Picker cycle time start count when Mold-opened signal ON. Then finish current cycle and wait for the next Mold-opened signal. If the waiting time is so long that picker cycle time exceed the maximum, alarm runs.
  - Thimb
    - Not Not use Ejection function. Eject enable output is always ON.
    - Use: In auto cycle, shutdown Eject enable signal at Moldopened signal turn ON, after ejection delay time, output Eject enable signal
  - SafeDoor
    - Not Use: Ignore Safety Door signal.
    - Use: Check Safety Door signal before arms descend.
  - MidMold
    - Not Use: Ignore Mid-Mold signal.
    - Use: Check Mid-Mold signal before arms descend.
  - StdbyGes
    - Define the fixture pose of first step in AUTO cycle.
    - Vert: Stay vertical before Mold-opened signal.
    - Hori: Stay horizontal before Mold-opened signal.
    - In same case choose Hori, after mold opened, fixture turn vertical first before arms descend. And after current picker cycle complete, stay horizontal waiting for next cycle start.
  - StdbyPos
    - Define the position of first step in AUTO mode.
    - Inside: Stay inside before Mold-opened signal. The Z-origin side.
    - Outside: Stay outside before Mold-opened signal. The Z-outsafeside.
  - StopSafe
    - Define the MoldClose enable output style in STOP mode.
    - Use: In STOP mode, MoldClose enable signal is always on.
    - Not Use: In STOP mode, MoldClose enable signal shutdown when mold-opened signal turn ON. MoldClose enable signal output when safety door turn ON.
  - **SubPutDe**
    - When transversing in/out, if Mid-Mold on, start timer, when timeout, vice arm goes down. (Only for H1).
  - StartPos
    - Define the Fetch position. This is the position of arm descending when a AUTO cycle start.
  - EmbInMld
    - Select if it need to insert a cell into the mold.
    - This function is ONLY for special machine. Users must select "Not" in normal application.

The following is spacial function page 2.

➤ **PointCnt**

Used when layout product. Each auto cycle, picker put down product at different

traversing.

InMold: Check the clips and suck limit signal only during Mold-in actions.

Full: Check the clips and suck limit signal all the time.

The following is spacial function page 3.

Stop	3/4	CurrM	21	CurrPos	0.0 mm
SafeDoor	500.0	PressSw	NomOpen		
OutStdby	600.0	SlowDown	Not Use		
SafeInMld	100.0	TrvOutPst	NotRst		
SlowDelay	0.5	TrvInPst	NotRst		
StartPoint	600.0	OpenSafeD	Conti		
AutoLimit	Not Use				
OpenF ●	SafeD ●	ClosE ●	Thimb ●		

- SafeDoor  
Set the position of safety door. Picker layout position should exceed this point.
- OutStdby  
When picker standby outside, it runs to this point when AUTO mode start.
- SafeInMld  
When picker's arms descend in the IMM mold-in area, this value is the maximum position of Z-movement. When arms are at up-limit and current Z position is a little larger than the set value, arms can not descend.
- SlowDelay  
This function is used for invert-controlled machine. This defines the time from traversing start to the slow valve start. Servo system do not use this parameter.
- MultiPoint  
Start point for layout array.
- AutoLimit  
Not Use: Ignore Auto signal form IMM in AUTO mode.  
Use: Check Auto signal before new cycle. If received not, alarm.
- PressSW  
Define the style of pressure signal.  
NomOpen: OPEN style. Signal is OFF when normal, ON to alarm.  
NomClose: CLOSE style. Signal is ON when normal, OFF to alarm.
- SlowDown  
**Not Use** Disable main arm slow down function.  
Use Enable main arm slow down function.
- TravOutPst  
Define the pose restriction for traversing out.

NotRst: No restriction.

Vert: Must be vertical.

Hori: Must be horizontal.

➤ TravInPst

Define the pose restriction for traversing in.

Same as above.


➤ OpenSafeD

Define the function of safety door when clip/suck failure.

Conti: Picker continue current auto cycle when safety door turn ON.

Stop: Picker stay and alarm ignore safety door signal.

Rest: Picker reset to standby point when safety door turn ON, and release all holdings. It start a new cycle when mold-opened signal turn ON next time.

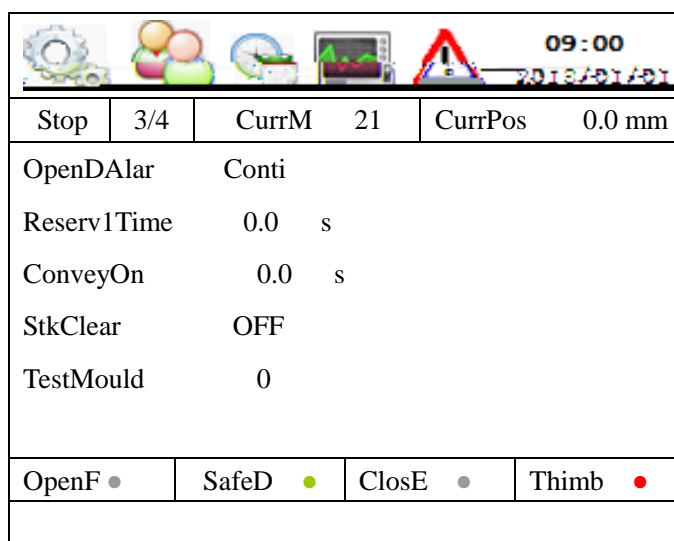

Stop	3/4	CurrM	21	CurrPos	0.0 mm
OpenDAlar	Conti				
ReservlTime	0.0 s				
ConveyOn	0.0 s				
StkClear	OFF				
TestMould	0				
OpenF ●	SafeD ●	ClosE ●	Thimb ●		

➤ OpenDAlar

Stop: When alarm cause of safe door at AUTO mode, stop this alarm if close the safe door, but do not continue automatically. MUST press Stop key, and restart AUTO mode.

Conti: When alarm cause of safe door at AUTO mode, close safe door to continue automatically.

➤ ReservlTime: If there's reserve action in program, this is the time for this action at AUTO mode.

➤ ConveyOn: If there's convey in program, this is the time of this action when at AUTO mode.


➤ StkClear: Clear the product number, the calculator will stack product from the first position.

- **TestMould:** The number of the test product. Every AUTO process, the first "TestMould" products will apply the TEST program. If set as 0, then disable this function.

**Notes: When users set functions such as standby, traverse pose, please confirm the auto-program must being coordinate with these settings.**

### 3.3 Servo

Input "7825" in password page, then press  ter servo function pages.

 <span style="float: right;">09:00</span>					
Stop	1/2	CurrM	21	CurrPos	0.0 mm
MaxPos		<input type="text" value="1000.0"/>	FBPulseIn	<input type="text" value="1"/>	
PulseIn		<input type="text" value="50"/>	FBPulseOut	<input type="text" value="1"/>	
FeedBack		<input type="text" value="Not Use"/>	AlarmTime	<input type="text" value="10"/>	s
DownGest		<input type="text" value="Verti"/>	AccDecTime	<input type="text" value="0.300"/>	s
OriSpeed		<input type="text" value="3"/> %	MaxSpeed	<input type="text" value="100"/>	%
			WholeSpeed	<input type="text" value="100"/>	%
OpenF ●	SafeD ●	ClosE ●	Thimb ●		

- **MaxPos**  
The maximum position arms can reach. All data set in MANUAL/AUTO mode can not exceed the maximum, otherwise alarm.
- **PulseIn**  
If send X pulses to servo, the arm will move D mm, then  


$$\text{PulseIn} = X / (10xD)$$
 It is the ratio of pulses and 0.1mm.
- **FeedBack**  
Users can use feedback function to check real position. For this application, OA+/OA-, OB+/OB- should be connect to servo.  
Not: Do not need feedback check.  
Use: The feedback position is shown in the actual area.
- **DownGest**  
Define the fixture pose when descending in IMM Mold-in area.  
Verti: Fixture must be vertical, otherwise alarm.  
Horiz: Fixture must be horizontal, otherwise alarm.


- OriSpeed  
Define the speed when finding the machinal 0-point. Too fast speed will cause a poor accuracy.
- FBPulseIn/FBPulseOut  
Feedback pulse = received pulse \* FBPulseIn/FBPulseOut  
Normally FBPulseIn=1, FBPulseOut=1, so Feedback pulse = received pulse.
- AlarmTime  
Define the beep time for each alarm.
- AccDecTime  
Define the acceleration/ deceleration time.
- MaxSpeed  
Unit is %.  
100% speed = 500K pulse per seconds.
- WholeSpeed



- b. The bold and italic list above is for picker manufacture. Users need not to modify these parameters.**

### 3.4 BackLight

Press  key in password page, enter backlight page.

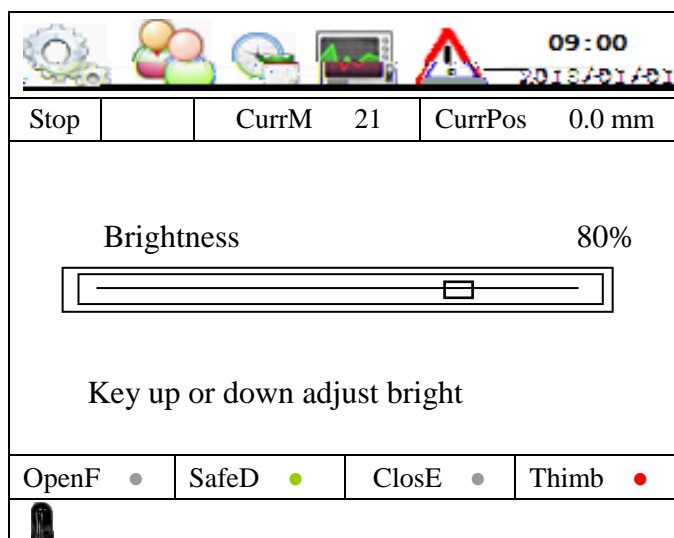



Use Up/Down key to adjust the brightness.

## CHAP.4 Program

### 4.1 Load & Teach


Press  key in STOP page, enter LOAD page.

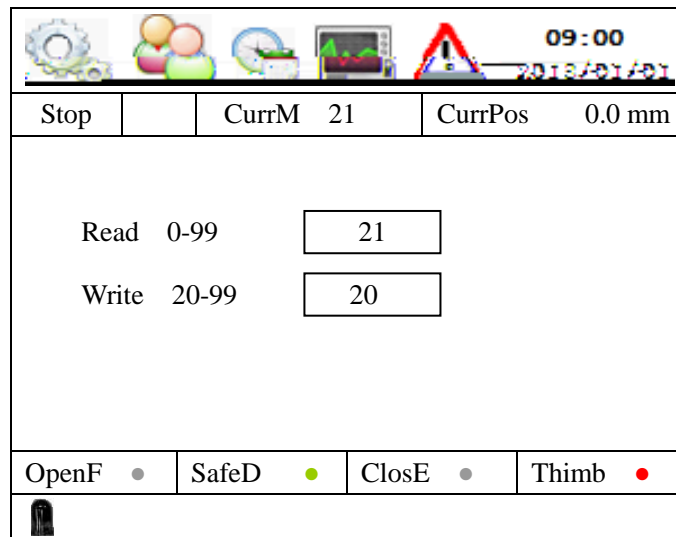




Input a mold number 21(0-99), then press  to load the program. The program runs in AUTO mode.

Users can read current mold to make a new one. Mold No. 0~19 is reserved for standard mold program.

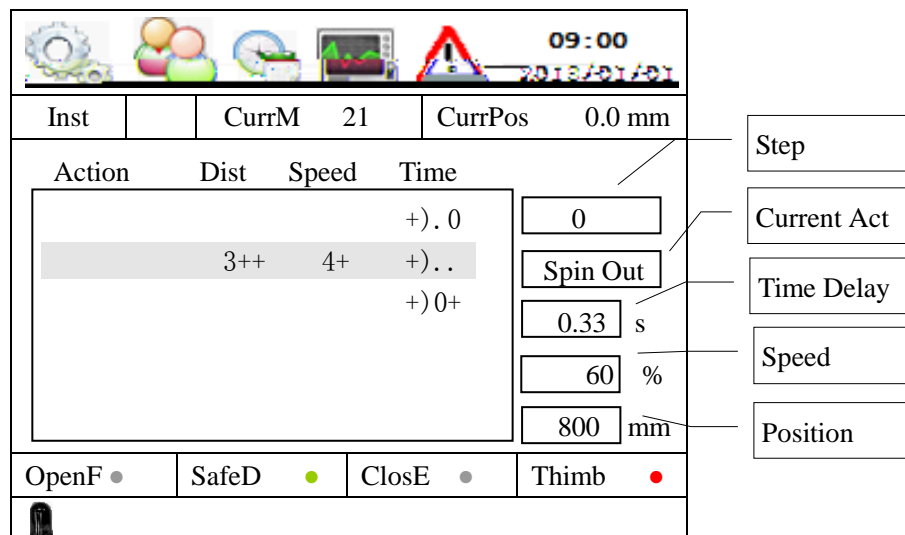To teach the program, press



Press  key step by step, picker will do the action list one by one. To teach a new action, using manual key to do this action, then press  key confirm the change.

 Insert a new line.

 Delete currnt line.

### 4.2 Edit

In STOP mode, press "Parameter" key to enter program edit page, which is similar to above page. Users can modify delay time, traverse position, traverse speed, but can not change the action sequency.

Action				Dist	Speed	Time
						+) . 0
	1++	3+				+) . .
						+) 0+
	3++	3+				+) 0+

00
Spin Out
0.3
80%
600mm

OpenF ●	SafeD ●	ClosE ●	Thimb ●
---------	---------	---------	---------

#### 4.4 Standard programs

Program1 Main L route suck forward side

Main arm descends -> Main arm goes forward -> Suck On -> Main arm goes backward  
-> Main arm rises -> Pose Horizontal -> Traverse out -> Main arm descends -> Suck off  
-> Main arm rises -> Traverse in -> Pose vertical -> Main arm goes backward

Program2 Main L route suck backward side

Main arm goes forward -> Main arm descends -> Main arm goes backward -> Suck On  
-> Main arm goes

clips on -> Vice arm goes forward -> Vice arm clips off -> Vice arm rises -> Vice arm goes backward

Program10 Vice L route clip forward side, release inside

Vice arm descends -> Vice arm goes forward -> Vice arm clips on -> Vice arm goes backward -> Vice arm clips off -> Vice arm rises

Program11 Vice U route clip forward side, release inside

Vice arm goes forward -> Vice arm descends -> Vice arm clips on -> Vice arm goes backward -> Vice arm clips off -> Vice arm rises

Program12 Vice U route clip backward side, release inside


Vice arm descends -> Vice arm clips on -> Vice arm goes forward -> Vice arm clips off -> Vice arm rises -> Vice arm goes backward


Program13 Both L route


Both arms descend -> Both arms go forward -> Suck On -> Vice arm clips on -> Both arms go backward -> Both arms rise -> Both arms go forward -> Pose Horizontal -> Traverse out -> Vice arm clips

## CHAP.5 Run status

### 5.1 Alarm record

In STOP mode, press  key, enter the alarm record page. The recent 50 alarm messages displayed.



Press  key again, enter the auto-cycle time page. In this page, 5 recent cycle time displayed.

 <span style="float: right;">09:00 2013/01/01</span>					
Stop		CurrM	21	CurrPos	0.0 mm



NO. MoldNum

### 5.2 Input/Output signal

Press WATCH key, enter the input signal monitor page. Use up/down key to display all signals.

 <span style="float: right;">09:00 2018/01/01</span>			
	-	-	+ +
+			++
-	A		--
.			-.
/			-/
0	A		-0
1			-1
2			-2
A			
			


Press WATCH key again, enter the output signal monitor page.


 <span style="float: right;">09:00 2018/01/01</span>			
	-	-	+ +
+			++
-	A		--
.			-.
/			-/
0	A		-0 -
1			-1
2			-2
A			
			

## CHAP.6 Machine Settings

Parameters in this chapter is related to machine definition. Manufacturers use these parameters but users must not modify them.

### 6.1 Time limit


Press  key twice in STOP page, then input password "\*\*\*\*\*", enter the time limit page.

 <span style="float: right;">09:00</span>			
Stop		CurrM 21	CurrPos 0.0 mm
MainUpDown	5.0	Trav	20.0
MainForwBk	<input type="text" value="5.0"/>	Posture	8.0
ViceUpDown	<input type="text" value="5.0"/>	Process1	10.0
ViceForwBk	5.0	Reversed2	10.0
OpenF ●	SafeD ●	ClosE ●	Thimb ●

- MainUpDown  
Time limit for main arm rising/descending. If actions can not finish in limit time, alarm occurs.
- MainForwBk  
Time limit for main arm going forward/backward.
- ViceUpDown  
Time limit for vice arm raising/descending.
- ViceForwBk  
Time limit for vice arm going forward/backward.
- Trav.  
Time limit for traversing in/out.
- Posture  
Time limit for fixture pose turning.
- Process1  
Time limit for process1 action.
- Reversed2  
Time limit for reserved2 action.



### 6.2 Structure

Press  key twice in STOP page, then input password "\*\*\*\*\*", enter the machine structure page.

Stop		CurrM 21	CurrPos 0.0 mm
TravAxis	<input type="text" value="Servo"/>	ViceForw	<input type="text" value="Not Use"/>
MainDown	<input type="text" value="Not Use"/>	ViceBack	<input type="text" value="Not Use"/>
MainForw	<input type="text" value="Not Use"/>	FreqDecel	<input type="text" value="DecT"/>
MainBack	<input type="text" value="Not Use"/>	FBPulse	<input type="text" value="NoFeed"/>
ViceDown	<input type="text" value="Not Use"/>		
OpenF ●	SafeD ●	ClosE ●	Thimb ●

- Trav.Axis  
Define the traverse axis style: servo/inverter/pnuematic.
- MainDown  
Define the use of main arm down limit signal.
- MainForw  
Define the use of main arm forward limit signal.
- MainBack  
Define the use of main arm forward limit signal.
- ViceDown  
Define the use of vice arm down limit signal.
- ViceForw  
Define the use of vice arm forward limit signal.
- ViceBack  
Define the use of vice arm backward limit signal.
- FreqDecel  
Speed decelerating style in invert/pnuematic control. DecT is decelerating by time. Dec.SW is by limit switches.
- FBPulse  
Use or not use feedback function.

## CHAP.7 Alarm Info

Press "STOP" key to clear alarm and move to original point.


- Error1 Mold Opened signal OFF, machine does not at waiting point
- Error2 Mid-mold confirm signal OFF, machine does not at waiting point
- Error3 Main arm rise limit OFF, machine does not at waiting point
- Error4 Vice arm rise limit OFF, machine does not at waiting point
- Error5 Main arm clamp limit ON, machine does not at waiting point
- Error6 Vice arm clamp limit ON, machine does not at waiting point
- Error7 Suck On limit ON, machine does not at waiting point
- Error8 Embrace limit ON, machine does not at waiting point
- Error9 Staying outside, machine does not at waiting point
- Error10 Staying inside, machine does not at waiting point
- Error11 Pose vertical limit OFF, machine does not at waiting point
- Error12 Pose Horizontal limit OFF, machine does not at waiting point
- Error13 When arms descend, Mold Opened signal OFF
- Error14 When arms descend, Mid-mold confirm signal OFF
- Error15 Mold Opened signal ON, Safety door signal OFF
- Error16 Mold Opened signal ON, Mid-mold confirm signal OFF
- Error17 Main arm rise limit ON, Main arm descend limit ON
- Error18 Main arm go forward limit ON, Main arm go backward limit ON
- Error19 Vice arm rise limit ON, Vice arm descend limit ON
- Error20 Vice arm go forward limit ON, Vice arm go backward limit ON
- Error21 Traverse out limit ON, Traverse in limit ON
- Error22 Pose Horizontal limit ON, Pose vertical limit ON
- Error23 Before arms descend, Mold Opened signal OFF
- Error24 Before arms descend, Mid-mold confirm signal OFF
- Error25 Before arms descend, Safety door signal OFF
- Error26 Before arms descend, Pose vertical limit OFF
- Error27 Before arms descend, Pose Horizontal limit OFF
- Error28 Before arms descend, Main arm clamp limit ON
- Error29 Before arms descend, Vice arm clamp limit ON
- Error30 Before arms descend, Suck On limit ON
- Error31 Before arms descend, Embrace limit ON
- Error32 Before traversing, Main arm descend Valve ON
- Error33 Before traversing, Vice arm descend Valve ON
- Error34 Before traversing, Main arm rise limit OFF
- Error35 Before traversing, Vice arm rise limit OFF
- Error36 Before pose changing, Main arm descend Valve ON
- Error37 Before pose changing, Vice arm descend Valve ON
- Error38 Main arm descend Valve ON, Main arm rise limit ON
- Error39 Main arm descend Valve ON, Main arm descend limit OFF

Error40 Main arm descend Valve OFF, Main arm rise limit OFF  
Error41 Main arm descend Valve OFF, Main arm descend limit ON  
Error42 Vice arm descend Valve ON, Vice arm rise limit ON  
Error43 Vice arm descend Valve ON, Vice arm descend limit OFF  
Error44 Vice arm descend Valve OFF, Vice arm rise limit OFF  
Error45 Vice arm descend Valve OFF, Vice arm descend limit ON  
Error46 Main arm go forward Valve ON, Main arm go forward limit OFF  
Error47 Main arm go forward Valve ON, Main arm go backward limit ON  
Error48 Main arm go forward Valve OFF, Main arm go forward limit ON  
Error49 Main arm go forward Valve OFF, Main arm go backward limit OFF  
Error50 Vice arm go forward Valve ON, Vice arm go forward limit OFF  
Error51 Vice arm go forward Valve ON, Vice arm go backward limit ON  
Error52 Vice arm go forward Valve OFF, Vice arm go forward limit ON  
Error53 Vice arm go forward Valve OFF, Vice arm go backward limit OFF  
Error54 Main arm clamp Valve ON, Main arm clamp limit OFF  
Error55 Main arm clamp Valve OFF, Main arm clamp limit ON  
Error56 Vice arm clamp Valve ON, Vice arm clamp limit OFF  
Error57 Vice arm clamp Valve OFF, Vice arm clamp limit ON  
Error58 Suck Valve ON, Suck limit OFF  
Error59 Suck Valve OFF, Suck limit ON  
Error60 Embrace Valve ON, Embrace limit OFF  
Error61 Embrace Valve OFF, Embrace limit ON  
Error62 Pose Horizontal Valve ON, Pose Horizontal limit OFF  
Error63 Pose vertical Valve ON, Pose vertical limit OFF  
Error64 Traverse out timeout  
Error65 Traverse in timeout  
Error66 Emergency stop  
Error67 Program is not integrity, operate can not perform.  
Error68 Operate cycle has arrived the product quantity set  
Error69 operate not according to the taught  
Error70 Waiting mold open time out  
Error71 Servo problem, no pulse input  
Error72 Servo Alarm  
Error73 Safety door position not set  
Error74 Putting down point less than the Safety Door point  
Error75 Putting down point larger than the maximum  
Error76 Outside waiting point less than the start point  
Error77 Outside waiting point larger than the maximum  
Error78 largest cycling putting down point larger than the maximum  
Error79 Traverse out end-limit error  
Error80 Traverse in end-limit error  
Error81 Machine does not stay at waiting point, please go to origin manually  
Error82 Machine does not stay at waiting point, please Traverse to waiting point  
Error83 Before Traverse in /out, please change its pose

## **CHAP.8 Interface**

### **8.1 The Main Control Board**

### 8.2 Adjust The Position Of Board

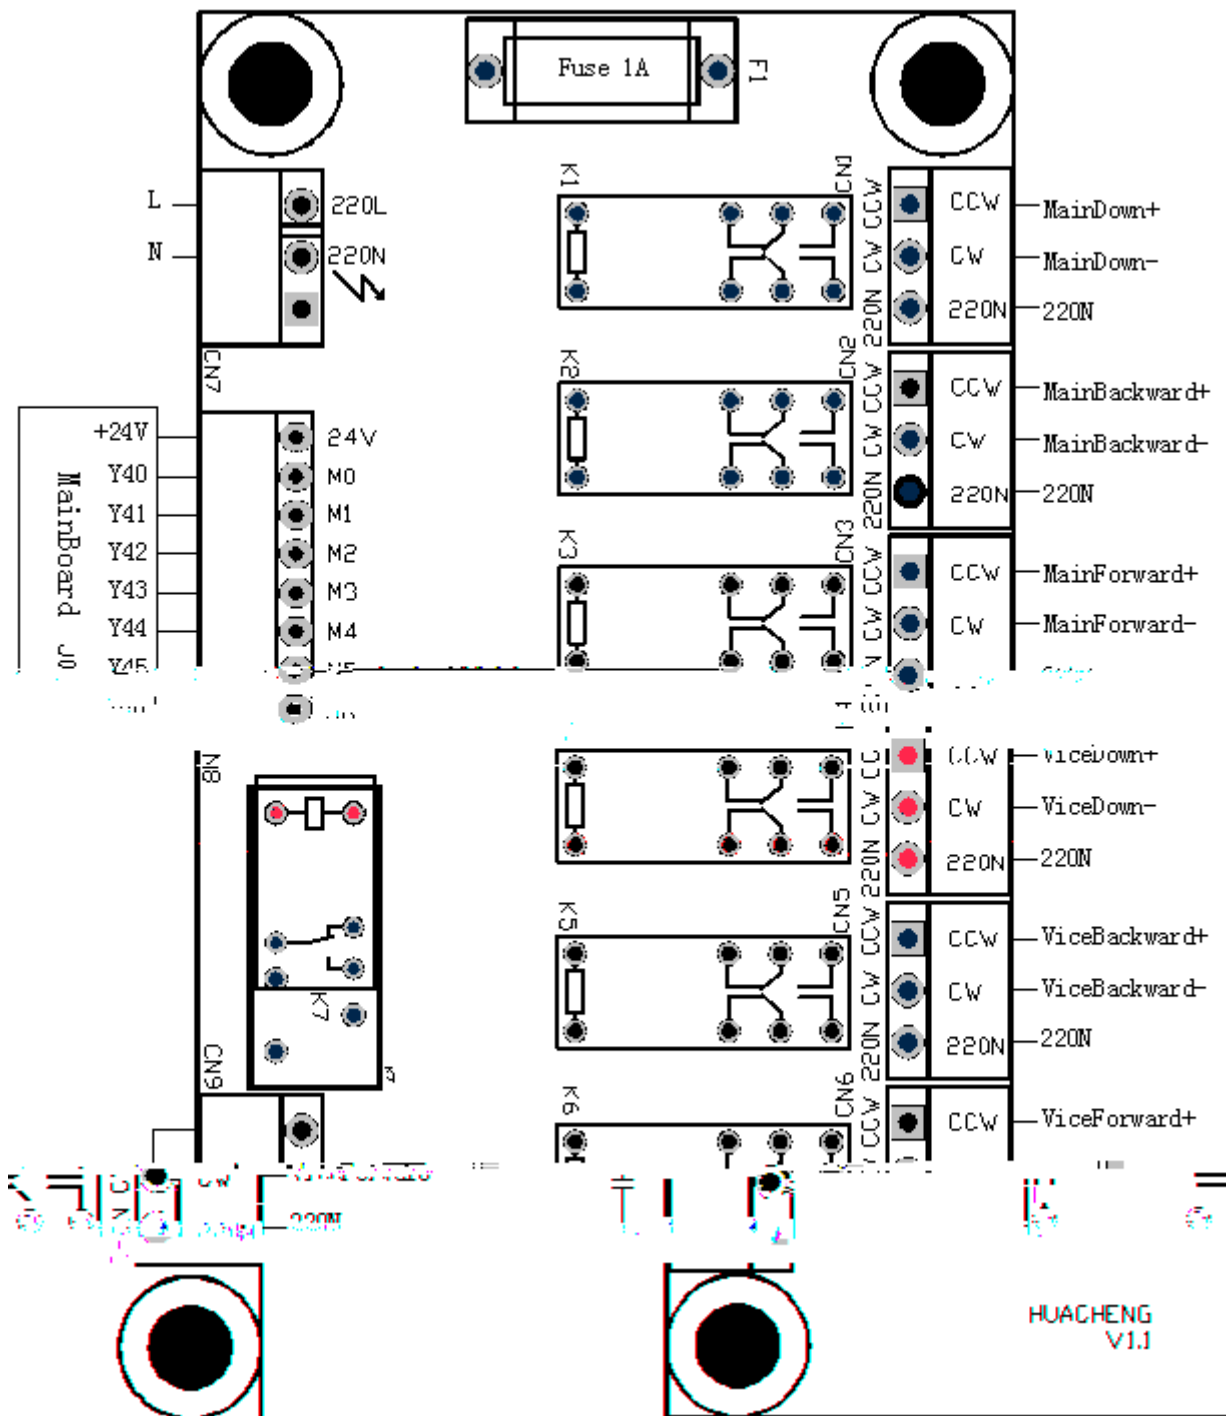

System use PL+,PL- as position pulses output, use NL+, NL- as negative pulses output. The maximum output speed is 500kps. And a motor turn around is 10000 pulse. Users can use jogging in MANUAL mode to test the servo.

### 8.3 Panasonic A5

Settings:

No.	Description	Value
Pr0.01	Control mold	0

### 8.4 Mitsubishi MR-E

Settings:

Note: Motor turn a cycle when received 10000 pulse. If not, modify parameter please.


No.	Description	Value
No.0	Control mode	***0
No.3	Numerator of Electronic Gear	1
No.4	Denominator of Electronic Gear	1
No.21	Input pulse style	0000
No.27	Feedback pulse per cycle	10000

Wire Connection

System		MR-E Servo		
Signal	Description	Pin	Signal	Description
PL+	Positive pulses	23	PP	Positive pulse Input
PL-		22	PG	
NL+	Negative pulses	25	NP	Positive pulse Input
NL-		24	NG	
OA+	Feedback PhaseA	15	LA	Phase A Output
OA-		16	LAR	
OB+	Feedback PhaseB	17	LB	PhaseB Output
OB-		18	LBR	
GND	GND	14	LG	Logical GND
+24V	+24V	1	VIN	Signal Power+
G2	+24VG	13	SG	Signal Power-
SRDY	Servo ready	9	ALM	Alarm
Note Servo Pin4(SON), Pin6(LSP), Pin7(LSN), Pin8(EMG) should be connected with Pin13(SG).				

## CHAP.9 Dimensions

### Dimension of the Main Control Board

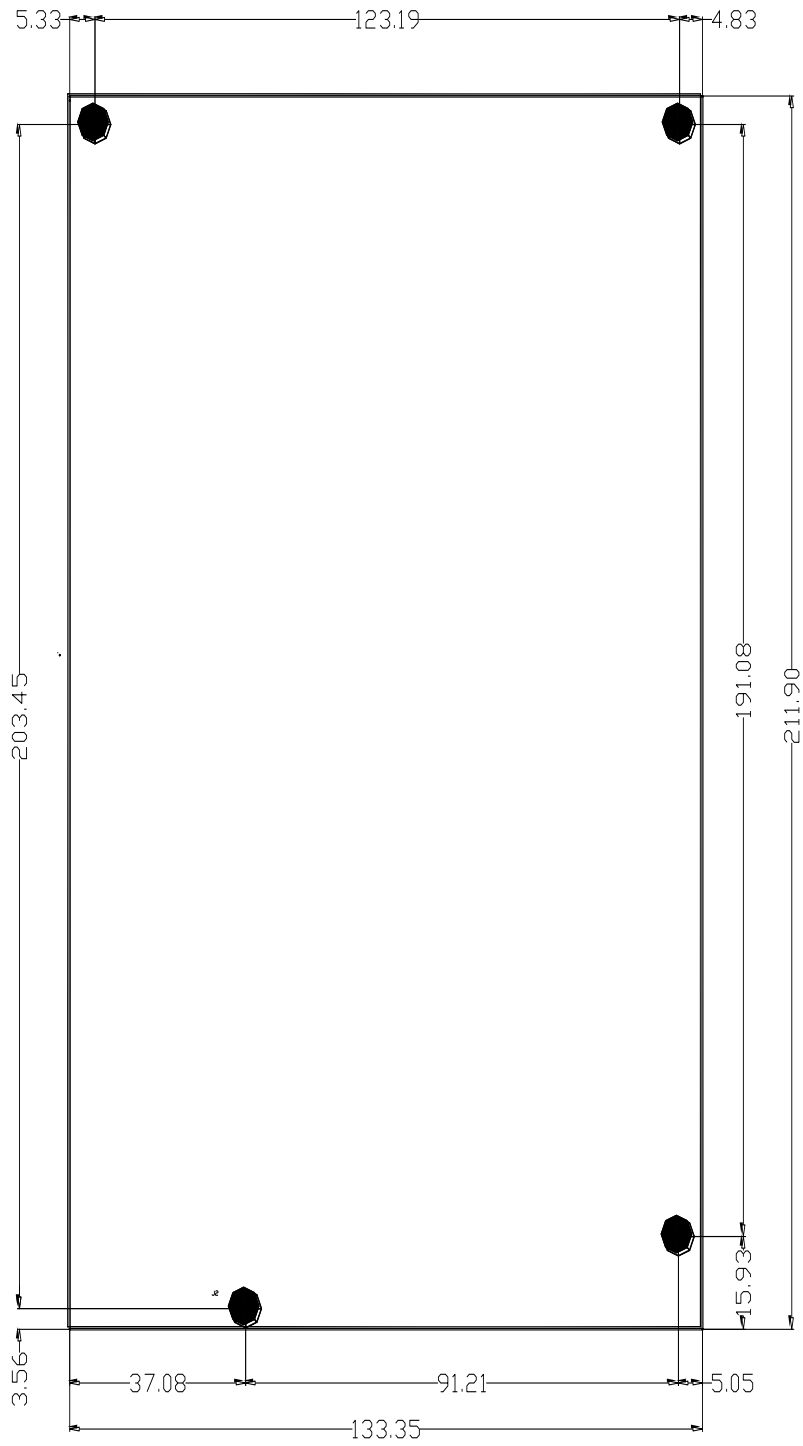



**Specifications subject to change without notice!**